



Title of the
Talk

Author's name

Introduction

Advanced
code

References

Title of the Talk

Author's name

22 September 2021



Tip of the
Tail

Author's name

Introduction

Advanced
code

References

Introduction



R Markdown

Home
Getting started

Author's name

Introduction

Advanced
code

References

This is an R Markdown presentation. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see <http://rmarkdown.rstudio.com>.

When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document.



Beamer Presentation Template

Tip of the
Tail

Author's name

Introduction

Advanced
code

References

This template has the same features as others in the **memoiR** package except for multi-language support (no `lang` item in the header).

See the code of the following slides for some specific code of slides.



Tip of the
Tail

Author's name

Introduction

Advanced
code

References

Advanced code



Slide with Incremental Bullets

Tip of the
Tail

Author's name

Introduction

Advanced
code

References

Incremental bullets start with $>$ - instead of $-$:

- Bullet 1



Slide with Incremental Bullets

Tip of the
Tail

Author's name

Introduction

Advanced
code

References

Incremental bullets start with $>$ - instead of $-$:

- Bullet 1
- A reference: Xie (2016).



Slide with Incremental Bullets

Tip of the
Tail

Author's name

Introduction

Advanced
code

References

Incremental bullets start with $>$ - instead of $-$:

- Bullet 1
- A reference: Xie (2016).
- Bullet 3



Slide with R Output

Top of the
Title

Author's name

Introduction

Advanced
code

References

R code chunks are displayed as follows:

```
head(cars)
```

speed	dist
4	2
4	10
7	4
7	22
8	16
9	10



Slide with a Centered Plot


Tip of the
Tail

Author's name

Introduction

Advanced
code

References

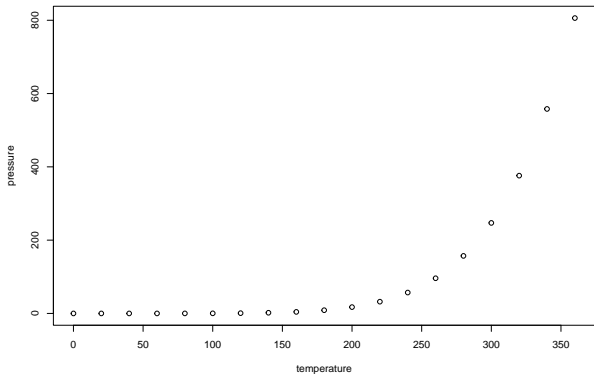



Two Column Layout

Title of the
Title

Author's name


Introduction

Advanced
code

References

This slide has two columns.
In Beamer, each column in
between `\begincol` and
`\endcol`.

In HTML, the `{.columns-2}`
option is added to the slide
title and `<p
class="forceBreak"></p>`
allows forcing column break.





Documentation

Top of the
Title

Author's name

Introduction

Advanced
code

References

See R Markdown: The Definitive Guide for full documentation about HTML slides.

Note:

- `{.flexbox .vcenter}` to center the HTML slide with plot.
- `out.width='90%'` to reduce the size of the plot in the Two Column Layout slide.

Keep the code below to have a slide for references, allow two-column slides in *ioslides* (but not in *Slidy*) and allow scrolling oversized slides.



Tip of the
Tail

Author's name

Introduction

Advanced
code

References

Xie, Y. (2016). *bookdown: Authoring Books and Technical Documents with R Markdown*. Boca Raton, Florida: Chapman and Hall/CRC.